


Model: GSCH1S04

■ Features

- DC and Type-c inputs.
- Support PD fast charging protocol.
- Independent LED charging status indicator
- Charge 4 batteries at the same time.
- Scientific charging curve management, efficient and ensure battery life.
- Real-time monitoring of battery temperature to ensure charging safety

■ Suitable Battery Model

Compatible with GSB1S38 lithium battery pack.

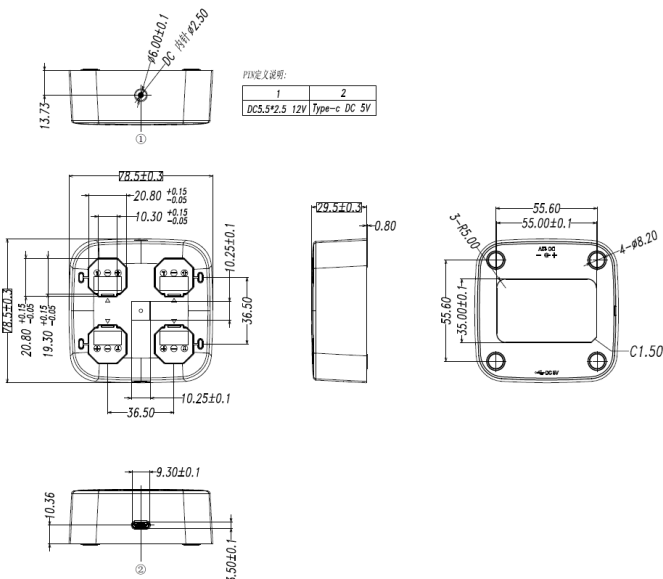

■ Certification Information



■ Key Parameters

Input voltage	DC 12V
	Type-c 5V/9V
Input current	DC 1.65A
	Type-c 2A
Input interface	DC $\phi 2.5 \times 5.5 \text{mm}$
	Type-c
Charging voltage	2.0V~4.23V
	(single channel)
Charging current	1.6A±0.1A
	(Fast charging mode)
Charging interface	TS / - / +
Dimensions	78.50*78.50*29.50mm
Weight	80g±20g

■ LED Display

White LED light	Connect input power supply
Red LED light	Standard state of charge
Green LED light	State of fullness
Red LED flashing	Fast charging state

■ Charge Characteristics

