

Model: GSCH4040

■ Features


- Wide voltage input.
- Follow SMBus v1.1 smart battery protocol.
- Intelligent identification of battery charging voltage and current, safe and efficient charging
- With power on, charging and full charge indicators.
- Full safety protection functions, such as over voltage, over current, reverse connection protection, etc.

■ Suitable Battery Model

Compatible with all TEFOO standard smart batteries.



■ Charge Characteristics

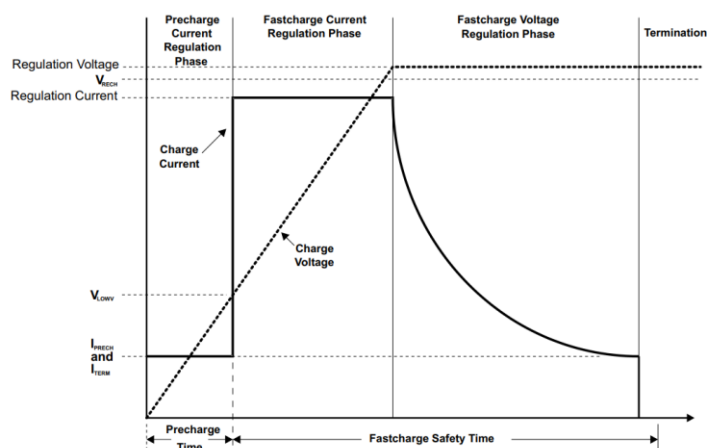

■ Certification Information





■ Key Parameters

| | |
|--------------------|--|
| Input voltage | DC 9V~24V (Input voltage should be greater than the maximum charging voltage+1v required by the battery.) |
| | |
| Input power | ≥ 120W |
| Input interface | DC φ2.5x5.5mm |
| Charging voltage | 0~16.8V (Adaptive 1~4 series smart battery) |
| Charging current | 0~4A |
| Charging interface | + / C / D / T / - |
| Dimensions | 144.00*111.00*35.00mm |
| Weight | 240g±10g |

■ LED Display

| | |
|--------------------|----------------|
| Blue LED light | Power on |
| Green LED flashing | Charging |
| Green LED light | Fully charged |
| Red LED light | Charging fault |

■ Selection Of Accessories

| Recommended | Categories | Models | Purpose |
|---|---------------|------------------|---|
|  | AC/DC Adapter | GSP19V120W55250 | Input: AC 90V~265V Output: DC 19.5/6.15A |
|  | Car Adapter | GSCAR19V5525100W | Input: DC 12V~24V Output: DC 19V/5.2A |