


## Model: GSSBR

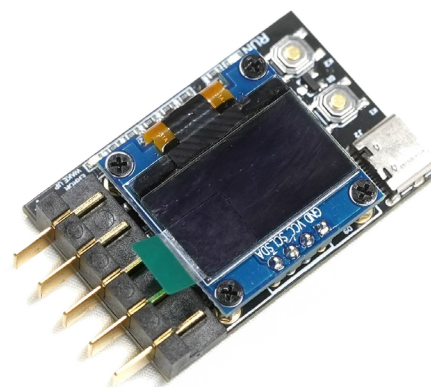


### Function

<b>Battery interface</b>	5PIN blade type smart battery connector, suitable for all TEFOO standard smart batteries.
<b>USB-C interface</b>	PD 12V, Used for activating the battery or power supply (during battery depletion, protection, or shutdown).
<b>Screen</b>	0.96 inch, Yellow and blue dual color screen, resolution 128 * 64.
<b>Anti reverse connection</b>	Yes, the red light is on when the battery is reversed
<b>Activatie feature</b>	Yes, the red light flashes or lights up when the battery is activated.
<b>Operation indication</b>	Blue light flashing at 1Hz indicates that the module is functioning normal.

### introduction

①	Display screen
②	Battery interface
③	USB-C interface
④	Operation buttons K1
⑤	Operation buttons K2
⑥	Running Indicator
⑦	Error or Wake up Indicator

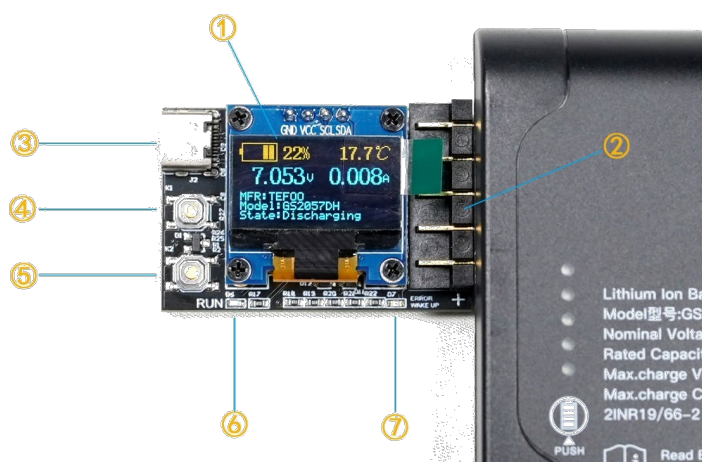

### Precautions

This Reader is only applicable to the TEFOO standard smart lithium battery pack series products.

TEFOO are not responsible for consequences of using this product outside its specified range

Do not throw into fire or water.

Do not press the screen forcefully.

Do not reverse connect the battery for a long time.

Do not connect USB and battery simultaneously for a long time to prevent overcharging of the battery

Reader has current consumption. Disconnect the battery when not in use to prevent battery drain

Do not insert USB-C when the battery is reverse connected.