

Model: GS2054HH

14.4V/6600mAh/95.04Wh


Features

- Compliant SMBus v1.1 Smart Battery specification
- Compliant with worldwide regulations and certifications
- Integrated LED RSOC indicator
- > Comprehensive protection functions
- Integrated balancing function effectively improves battery life
- > Fuel gauge accuracy up to 1%


Application


Portable electronics, medical equipment, ruggedized computers, embedded systems, etc.

■ **Dimension drawing** (Unit: mm)




Charge and Discharge Characteristics

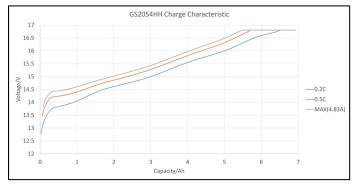



Cycle life

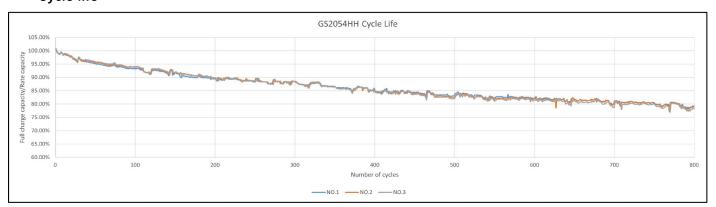



Key parameters

Rated voltage	14. 4V
Rated capacity	6. 6Ah
Nominal capacity	6. 9Ah
Charging temperature	0°C~50°C
Discharge temperature	-20°C~60°C
Max charging voltage	16.8V
Max charging current	4.83A
Max discharge current	8. 0A
Cycle life	500 cycles, ≥80%
Internal resistance	<150 m Ω
Weights	$445\mathrm{g}\pm10\mathrm{g}$
Interface	+/C/D/T/-



Selection Of Accessories Recommended Categories Models **Purpose** GSC550M18012D Mating male connector for 180° or 90° PCB **Battery Connector** GSC550M09010D mounting on the host side **Battery Connector** Connection plate mounted in the unit's **GSCBB Board** battery compartment **Battery Adapter** Suitable for standard smart battery **GSSBC** Cable connection Quick readout of battery data and status **SMBus Reader GSSBR** without external power supply, a simple and effective R&D tool **Battery Power** Buck charging of batteries and seamless **GSPMBSMbus Management Board** switching between mains and battery power Boost or buck charging of batteries and **Battery Power** seamless switching between mains and GSPMB20 **Management Board** battery power, using multiple GSPMB20s to support parallel powering of battery packs Lightweight, small volume. Efficient and fast **Portable Battery** GSCH054D charging. Compatible with GSX054 series Charger batteries. SMBus V1.1 compliant, compatible with all GSCH40 Single Charger TEFOO standard smart battery packs SMBus V1.1 compliant, compatible with all **Dual Charger** GSCH4040 TEFOO standard smart battery packs

Relevant Certification















UN38.3

REACH





















GB/T 28164-2011









* Please confirm the authentication status of the gray dotted box with our business personnel.